



ADA Presentation

FY 21/22 ADA Projects

Human Resources Department

Introduction

ADA Coordinator


- Amanda Manning
- Human Resources Department

Scope of Work

- Inspect County Facilities and Programs for ADA and TAS Compliance
- Transition Plan
- Grievances

Scope of Presentation

- Facilities Completed
- Projects Completed

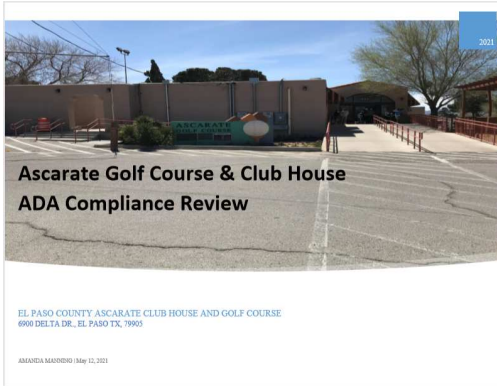

In the review of the the Ascarate Golf Course and Club House, located at 6900 Delta Dr., El Paso Texas 79905, a systematic approach was taken. The review began with the parking area in front of the club house and progressed through the following areas: the building approach and entrance, the lobby area, restrooms, and locker rooms. The golf course was also inspected for compliance with the following items inspected: teeing grounds, putting greens, weather shelters, accessible routes, barriers, and practice areas. At the time only the public areas were reviewed for compliance with the Texas Accessibility Standards (TAS) and the Americans with Disabilities Act Accessibility Guidelines (ADAAG).

The areas inspected for compliance are based on the Department of Justice's (DOJ) priority list and are as follows: Approach and Entrance (parking, route of travel up to and into the building); Access to Goods and Services (horizontal circulation corridors and doorways, vertical circulation elevators); Restrooms, and Additional Access (other features such as drinking fountains).

The following report lists the deficiencies of elements in each of the priority areas and what the code requires to make them compliant with the TAS and ADAAG.


Priority 1 – Approach and Entrance

Parking	Accessible parking spaces shall be identified by signs, access route, and signage.														
Survey Question	TAS Reference	Pictures	Violation/Comments												
Are the minimum number of accessible parking spaces provided according to the number of available parking spaces?	208.1 Minimum Number. Parking spaces complying with 202 shall be provided in accordance with table 208.2 except as required by 208.2.1, 208.2.2, and 208.2.3. Where more than one parking facility is provided on a site, the number of accessible spaces provided on the site shall be calculated according to the number of spaces required for each parking facility.		There are 211 parking spaces available to the golf course and clubhouse. 12 parking spaces are marked as accessible, but not fully compliant with the TAS requirements. The minimum number requirement is met and is compliant with TAS requirements. The following section will explain how to bring the accessible spaces into minimum compliance with TAS requirements.												
	<table> <tr> <th>Total Spaces</th> <th>Accessible Spaces</th> </tr> <tr> <td>1 - 25</td> <td>1</td> </tr> <tr> <td>26 - 50</td> <td>2</td> </tr> <tr> <td>51 - 75</td> <td>3</td> </tr> <tr> <td>76 - 100</td> <td>4</td> </tr> <tr> <td>100+</td> <td>see 2010 Standards 208.2</td> </tr> </table>	Total Spaces	Accessible Spaces	1 - 25	1	26 - 50	2	51 - 75	3	76 - 100	4	100+	see 2010 Standards 208.2		6 accessible marked with signs
Total Spaces	Accessible Spaces														
1 - 25	1														
26 - 50	2														
51 - 75	3														
76 - 100	4														
100+	see 2010 Standards 208.2														
	202.1 General. Car and van parking spaces shall comply with 202. Where parking spaces are marked with lines, width measurements of parking spaces and access routes shall be made from the centerline of the markings.		6 accessible no signs												

Priority 2 – Access to Goods and Services

Survey Question	TAS Reference	Pictures	Violation/Comments
Seating: Are dining surfaces (countertops, cabinets, bars, etc.) and non-employee work surfaces (litterbins, conference rooms, etc.) accessible to people who use wheelchairs?	228.4 General. Where dining surfaces are provided for the consumption of food or drink, at least 5 percent of the seating spaces and standing spaces at the dining surfaces shall comply with 202. In addition, where work surfaces are provided for use by other than employees, at least 5 percent shall comply with 202.		There are no accessible seating areas at the bar. This is not compliant with TAS requirements.
Is the height of the dining or work surfaces no less than 28 inches and no more than 34 inches?	202.3 Height. The tops of dining surfaces and work surfaces shall be 28 inches minimum and 34 inches maximum above the finish floor or ground.		The height of the dining surface at the bar is 45 inches, this is not compliant with TAS requirements.

Are accessible spaces identified with a sign that includes the International Symbol of Accessibility?	208.2 Identification. Parking space identification signs shall include the International Symbol of Accessibility complying with 703.2.1.1. Signs identifying van parking spaces shall contain the designation "van accessible." Signs shall be 40 inches minimum above the finish floor or ground surface measured to the bottom of the sign.		The accessible parking sign, on the south side of the accessible path, is 57 inches above the ground. This is not compliant with TAS requirements.
Are signs reading "van accessible" or "van accessible space"?			The parking signs along the south wall are 59 inches above the ground. This is not compliant with TAS requirements.
			The parking spaces located in the parking area do not have signs indicating they are accessible parking spaces. This is not compliant with TAS requirements.

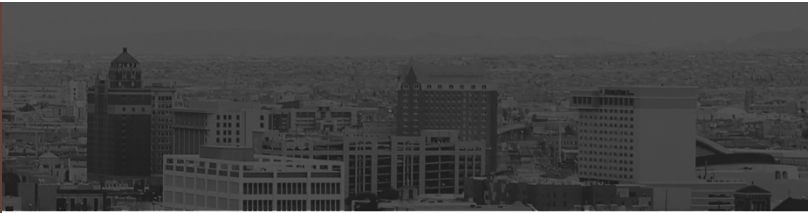


ADA Inspection Report



Pool Chair Lifts

- Ascarate Pool
- Gallegos Pool
- Fabens Pool

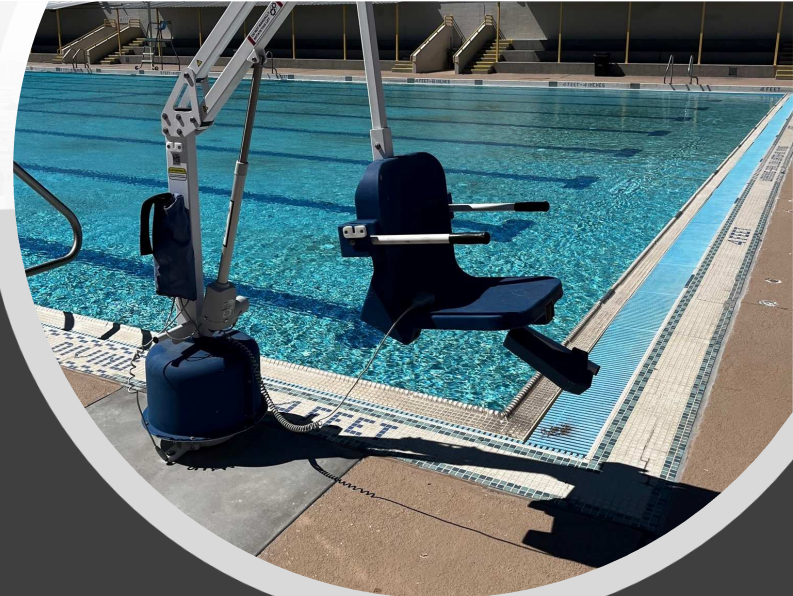



Please connect adapter to headset first
Connecter l'adaptateur au casque en premier
Collegare l'adattatore all'auricolare prima

Assisted Listening Devices

- County Courthouse



Ascarate Tax Office Annex

- Parking Lot Re-striping
- Elevator Maintenance




Gallegos Park



■ Parking Spaces

- 12 Total Spaces
- 5 Accessible Spaces
- 3 Van Accessible

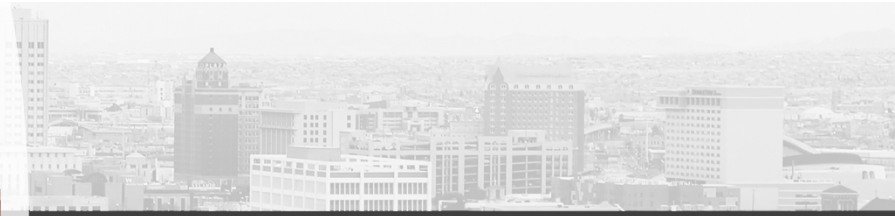

Courthouse

- Skywalk Doors
- Restrooms
 - 1st & 3rd Floor Men's & Women's
 - 5th Floor Men's



Youth Service Center

- Door Opener
- Door Clearance



ADA Fund

- Ascarate, Fabens, Gallegos Pools Chair Lifts & Installation
 - Chairs - **\$12,188 (FY 18/19)**
 - Installation - **\$9,924 (FY 21/22)**
- Assisted Listening Devices (Courthouse) – **\$1,705 (FY 21/22)**
- Ascarate Annex Elevator - **\$5,000 (FY 21/22)**
- Ascarate Annex Parking Lot Re-striping – **\$33,000 (FY 21/22)**
- Gallegos Parking Lot Striping - **\$9,650 (FY21/22)**
- Courthouse Sky Walk Doors - **\$6,780 (FY 21/22)**
- Youth Services Center Atrium Door Opener - **\$2,860 (FY 21/22)**

ADA Fund

- Fabens Warehouse Men's Restroom Renovation - **\$16,416 (FY 21/22)**
- Courthouse 5th Floor Men's Restroom - **\$10,732 (FY 21/22)**
- Courthouse 1st & 3rd Floor Men's & Women's Restrooms - **\$200,808**
 - **\$52,500 (2012 Facilities ADA Bond)**
 - **\$148,308 (FY 21/22)**
- Downtown Detention Doors – **\$162,578 (2012 ADA Bonds allocated to SO for ADA projects)**
- Downtown Detention 1st & 12th Floor Restrooms - **\$19,662 (2012 ADA Bonds)**



Totals

- FY 18/19 Fund
 - \$12,188

- FY 21/22 Fund
 - \$244,375

- ADA Bond for S.O.
 - \$182,240

- ADA Facilities Bond
 - \$52,500

FY 20/21 Accomplishments

28

- Buildings have been inspected for compliance and reports have been issued.

9

- Buildings have been corrected, partially corrected, or are in the process of being corrected.

14

- Parks have been inspected for compliance and reports have been issued.


7

- Parks have been corrected, partially corrected, or are in the process of being corrected.

3

- All abilities playgrounds added or are in the process of being added to existing parks.

FY 2023 Goals

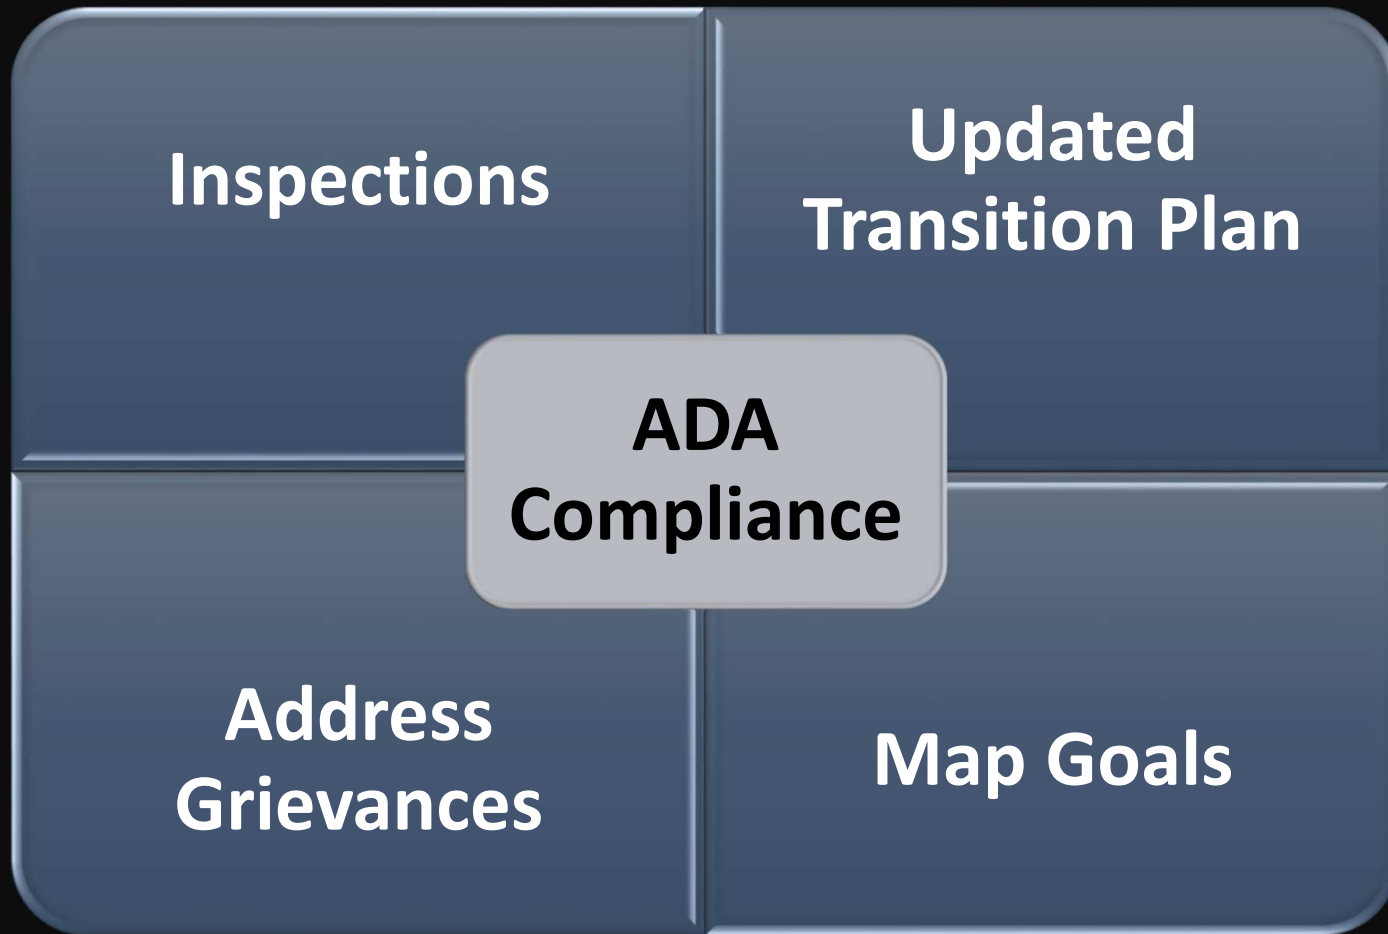

Questions?

